

VG5000 Series Forged Brass Valves

The VG5000 forged brass valve series is primarily designed to regulate the flow of water in response to the demand of a controller in zone and terminal unit applications.

They can be used in combination with VA-7010 Electric ON/OFF Actuator, VA-7040 Thermal Actuator and or VA-7450 Incremental or Proportional Actuator.


The valves are available in 2-way PDTC (Normally Open), 2-way PDTO (Normally Closed), 3-way mixing and 3-way mixing with built-in Normally Open bypass configurations.



**VG5000 3-way mixing with VA-7450 (left)
VG5000 2-way valve with VA-7010 (right)**

Features and Benefits		
☐	2-way PDTO (NC), PDTC (NO) and 3-way configurations	Flexible applications
☐	3-way with built-in bypass configuration	Reduces piping installation time and cost
☐	Selectable flow characteristic in combination with VA-7452-9001 actuators	Improves controllability
☐	Forged brass body, stainless steel stem and spring	Ensure long life and it is compact
☐	Rubber compound plug for bubble-tight shut-off	Maximises energy saving
☐	Field adjustable Kv_s for select body styles	Reduce stock and offers flexibility
☐	Actuator can be field installed after piping	Simplifies installation in confined location
☐	Built-in return spring	Allows the valve to return to normal position when actuator is not mounted or when VA-7010/VA-7040 Actuator is de-energised

Ordering Code

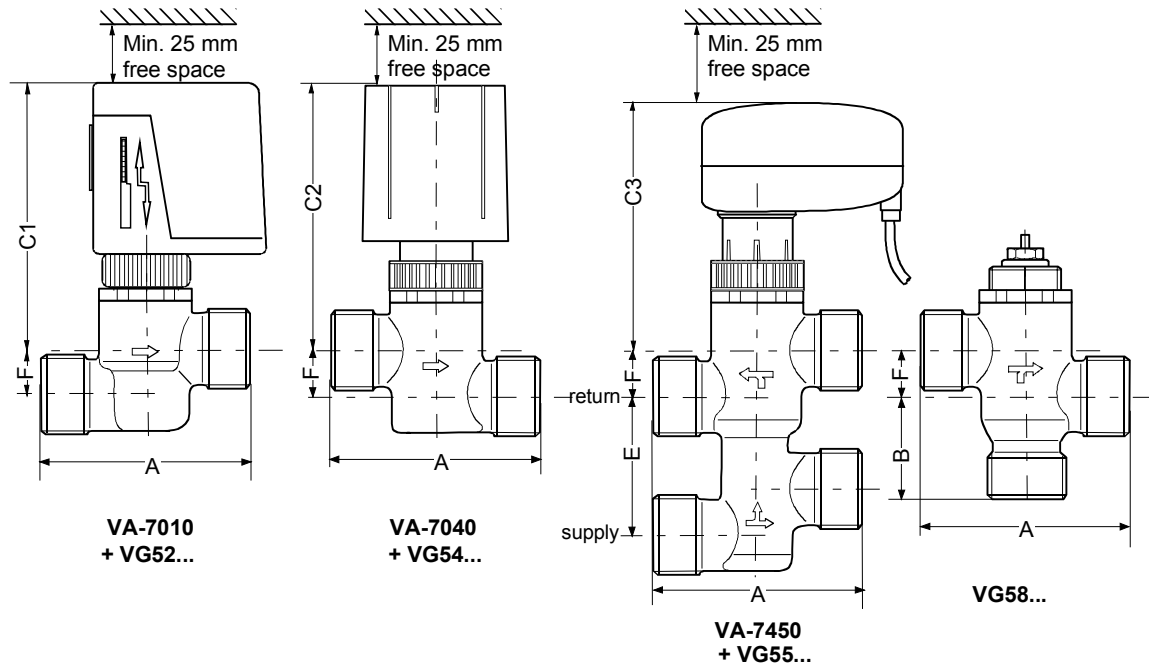

Threaded Male Connection

Ordering Code	Body Type	Body Size	Factory Set Kv_s and alternative adjustable Kv_s			Close-Off Pressure (kPa)	Dimensions (mm)						
			1	2	3		A	B	C1	C2	C3	E	F
			z = 1	z = 1	z = 1		z = 9	z = 9	(VA-7010)	(VA-7040)	(VA-7450)		
VG52z0AC	2-way PDTC (NO)	DN15	0.4	<u>0.25</u>	-	200	68	-	96	95	90	-	11
VG52z0BC		DN15	<u>0.4</u>	0.25	-	200	68	-	96	95	90	-	11
VG52z0CC		DN15	1	<u>0.63</u>	-	200	68	-	96	95	90	-	11
VG52z0DC		DN15	<u>1</u>	0.63	-	200	68	-	96	95	90	-	11
VG52z0EC		DN15	<u>1.6</u>	-	-	100	72	-	98	97	92	-	13.5
VG52z0JC		DN20	<u>2.5</u>	-	-	140	74	-	98	97	92	-	15
VG52z0KC		DN20	<u>3.5</u>	-	-	100	74	-	98	97	92	-	15
VG54z0AC	2-way PDTC (NC)	DN15	0.4	<u>0.25</u>	-	200	68	-	96	95	90	-	11
VG54z0BC		DN15	<u>0.4</u>	0.25	-	200	68	-	96	95	90	-	11
VG54z0CC		DN15	1	<u>0.63</u>	-	200	68	-	96	95	90	-	11
VG54z0DC		DN15	<u>1</u>	0.63	-	200	68	-	96	95	90	-	11
VG54z0EC		DN15	<u>1.6</u>	1	0.63	100	72	-	98	97	92	-	13.5
VG54z0JC		DN20	3.5	<u>2.5</u>	1.6	100	74	-	98	97	92	-	15
VG54z0KC		DN20	<u>3.5</u>	2.5	1.6	100	74	-	98	97	92	-	15
VG58z0AC	3-way Mixing	DN15	<u>0.25</u>			200	68	26.5	96	95	90	-	11
VG58z0BC		DN15	<u>0.4</u>			200	68	26.5	96	95	90	-	11
VG58z0CC		DN15	<u>0.63</u>			200	68	26.5	96	95	90	-	11
VG58z0DC		DN15	<u>1</u>			200	68	26.5	96	95	90	-	11
VG58z0EC		DN15	<u>1.6</u>			100	72	34.5	98	97	92	-	13.5
VG58z0JC		DN20	<u>2.5</u>			100	74	36	98	97	92	-	15
VG58z0KC		DN20	<u>3.5</u>			100	74	36	98	97	92	-	15


Threaded Male Connection (continued...)

Ordering Code	Body Type	Body Size	Factory Set Kv_s and alternative adjustable Kv_s	Close-Off Pressure (kPa)	Dimensions (mm)						
					A	B	C1 (VA-7010)	C2 (VA-7040)	C3 (VA-7450)	E	F
					z = 1 z = 9	z = 1 z = 9					
VG55z0AC	3-way + built-in NO bypass	DN15	<u>0.25</u> (0.25)	200	68	-	96	95	90	40	11
VG55z0PC		DN15	<u>0.4</u> (0.25)	200	68	-	96	95	90	40	11
VG55z0BC		DN15	<u>0.4</u> (0.4)	200	68	-	96	95	90	40	11
VG55z0QC		DN15	<u>0.63</u> (0.4)	200	68	-	96	95	90	40	11
VG55z0CC		DN15	<u>0.63</u> (0.63)	200	68	-	96	95	90	40	11
VG55z0RC		DN15	<u>1</u> (0.63)	200	68	-	95	95	90	40	11
VG55z0DC		DN15	<u>1.0</u> (1.0)	200	68	-	95	95	90	40	11
VG55z0SC		DN15	<u>1.6</u> (1.0)	100	72	-	95	95	90	40	13.5
VG55z0EC		DN15	<u>1.6</u> (1.6)	100	72	-	95	95	90	40	13.5
VG55z0TC		DN20	<u>2.5</u> (1.6)	100	74	-	97	97	92	40	15
VG55z0JC		DN20	<u>2.5</u> (2.5)	100	74	-	97	97	92	40	15
VG55z0UC		DN20	<u>3.0</u> (2.5)	100	74	-	97	97	92	40	15
VG55z0KC		DN20	<u>3.0</u> (3.0)	100	74	-	97	97	92	40	15

Threads

z = 1 BSP parallel

z = 9 Compression fitting (only for Bodies with connection size ½")

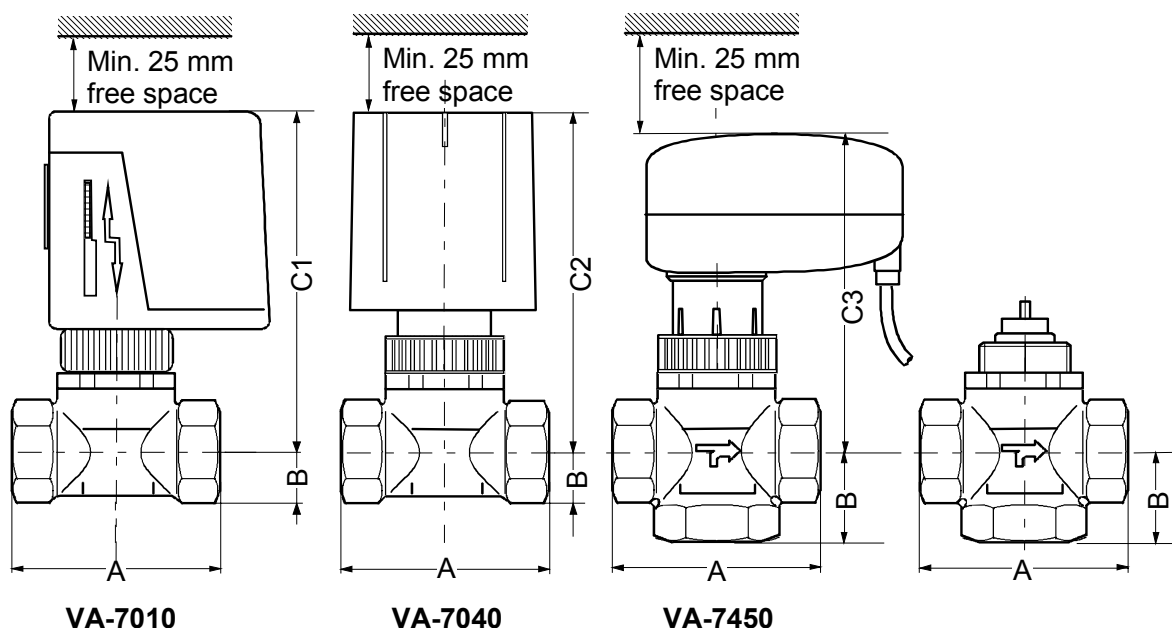


Threaded Female Connection

Ordering Code	Body Type	Body Size	Factory Set Kv_s and alternative adjustable Kv_s			Close-Off Pressure (kPa)	Dimensions (mm)				
			1	2	3		A	B	C1 (VA-7010)	C2 (VA-7040)	C3 (VA-7450)
VG52y0AC	2-way PDTC (NO)	DN15	<u>0.25</u>	0.4		200	55	15	100	99	94
VG52y0BC		DN15	0.25	<u>0.4</u>		200	55	15	100	99	94
VG52y0CC		DN15	1.6	1	<u>0.63</u>	200	55	15	100	99	94
VG52y0DC		DN15	1.6	<u>1</u>	0.63	200	55	15	100	99	94
VG52y0EC		DN15	<u>1.6</u>	1	0.63	200	55	15	100	99	94
VG52y0JC		DN20	<u>2.5</u>	-	-	140	66	19	103	102	97
VG52y0KC		DN20	<u>3.5</u>	-	-	100	66	19	103	102	97
VG52y0MC		DN25	<u>5.5</u>	-	-	62	90	24	106	105	100
VG54y0AC	2-way PDTO (NC)	DN15	<u>0.25</u>	0.4		200	55	15	100	99	94
VG54y0BC		DN15	0.25	<u>0.4</u>		200	55	15	100	99	94
VG54y0CC		DN15	1.6	1	<u>0.63</u>	200	55	15	100	99	94
VG54y0DC		DN15	1.6	<u>1</u>	0.63	200	55	15	100	99	94
VG54y0EC		DN15	<u>1.6</u>	1	0.63	200	55	15	100	99	94
VG54y0JC		DN20	3.5	<u>2.5</u>	1.6	100	66	19	103	102	97
VG54y0KC		DN20	<u>3.5</u>	2.5	1.6	100	66	19	103	102	97
VG54y0MC		DN25	<u>5.5</u>	4	2.5	62	90	24	106	105	100
VG58y0CC	3-way Mixing	DN15	<u>0.63</u>			200	55	29	100	99	94
VG58y0DC		DN15	<u>1</u>			200	55	29	100	99	94
VG58y0EC		DN15	<u>1.6</u>			200	55	29	100	99	94
VG58y0JC		DN20	<u>2.5</u>			100	66	33.5	103	102	97
VG58y0KC		DN20	<u>3.5</u>			100	66	33.5	103	102	97
VG58y0MC		DN25	<u>5.5</u>			62	90	37.5	106	105	100

Threads

- y = 0 BSP parallel
- y = 2 BSP taper
- y = 4 NPT

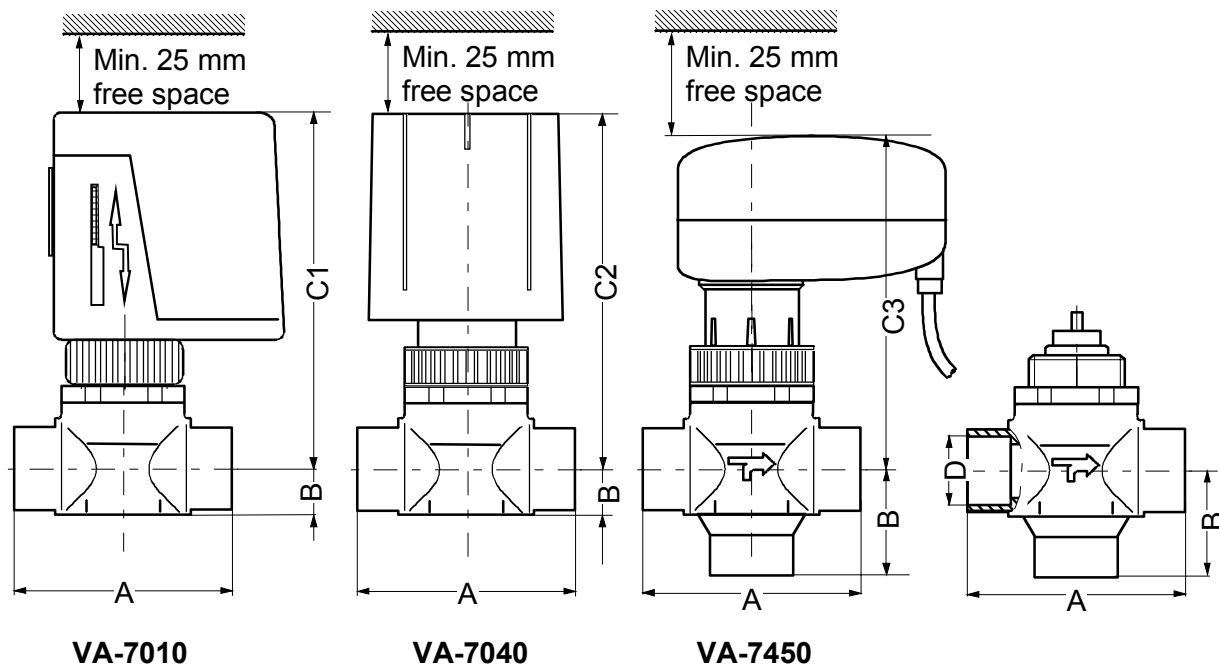

Sweat Connection


Ordering Code	Body Type	Body Size	Factory Set Kv _s and alternative adjustable Kv _s			Close-Off Pressure (kPa)	Dimensions (mm)					
			1	2	3		A	B	C1 (VA-7010)	C2 (VA-7040)	C3 (VA-7450)	D
VG5270AC	2-way PDTC (NO)	DN15	<u>0.25</u>	0.4		200	61	13	100	99	94	15.98
VG5270BC		DN15	0.25	<u>0.4</u>		200	61	13	100	99	94	15.98
VG5270CC		DN15	1	<u>0.63</u>	0.4	300	61	13	100	99	94	15.98
VG5270DC		DN15	<u>1</u>	0.63	0.4	300	61	13	100	99	94	15.98
VG5270EC		DN15	<u>1.6</u>	1	0.63	200	61	13	100	99	94	15.98
VG5270JC		DN20	<u>2.5</u>	-	-	140	78	16.5	103	102	97	22.3
VG5270KC		DN20	<u>3.5</u>	-	-	100	78	16.5	103	102	97	22.3
VG5270LC		DN25	<u>4</u>	-	-	85	95	17	106	105	100	28.7
VG5270MC		DN25	<u>5.5</u>	-	-	62	95	17	106	105	100	28.7
VG5470AC	2-way PDTO (NC)	DN15	<u>0.25</u>	0.4		200	61	13	100	99	94	15.98
VG5470BC		DN15	0.25	<u>0.4</u>		200	61	13	100	99	94	15.98
VG5470CC		DN15	1.45	1	<u>0.63</u>	200	61	13	100	99	94	15.98
VG5470DC		DN15	1.45	<u>1</u>	0.63	200	61	13	100	99	94	15.98
VG5470EC		DN15	<u>1.45</u>	1	0.63	200	61	13	100	99	94	15.98
VG5470JC		DN20	3.2	<u>2.5</u>	1.6	100	78	16.5	103	102	97	22.3
VG5470KC		DN20	<u>3.2</u>	2.5	1.6	100	78	16.5	103	102	97	22.3
VG5470MC		DN25	<u>5</u>	4	2.5	62	95	17	106	105	100	28.7
VG5870EC		3-way Mixing	DN15	<u>1.45</u>			200	61	30.5	100	99	94
VG5870KC	DN20		<u>3.2</u>			100	78	39	103	102	98	22.3
VG5870MC	DN25		<u>5</u>			62	95	47.5	106	105	100	28.7

Maintenance and Service

Description	Code Number
Packing Nut with integral o-ring	VG5000-1

Valve Selection

The valve size for water applications can be defined using the diagrams below, where the intersection of the pressure drop over the completely open valve and the flow has to stay within the white area.

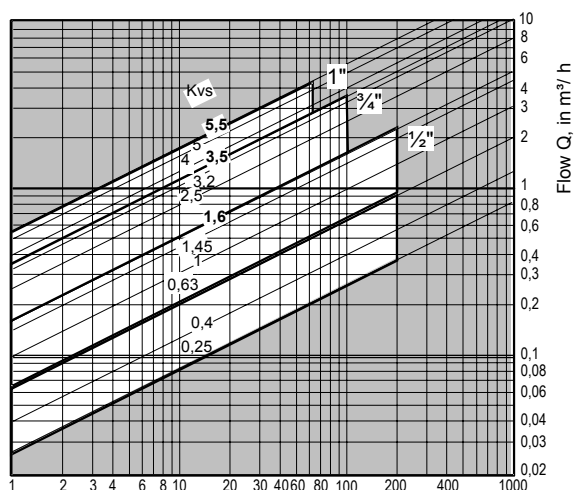

Kvs selection diagram in SI units, full seat

Valve - Actuators Combinations

The VG5000 valve series are designed to be used with the VA-7010 series electric on/off, VA-7040 thermal and VA-7450 electronic modulating actuators. The ordering data for these actuators are as follows:

VA-7010 Series Electric Actuator

Item Codes	Supply Voltage
VA-7010-8xx1	24 VAC
VA-7010-8xx3	230 VAC
VA-7010-8xx5	100 VAC

See "VA-7010" Product Bulletin for more information.

VA-7040 Series Thermal Actuator

VA-7040-2x	Supply voltage
VA-7040-21	24 VAC or 24 VDC
VA-7040-23	230 VAC

See "VA-7040" Product Bulletin for more information.

VA-7450 Series Electronic Actuator

Item Code	Features
VA-7450-1001	• Incremental control • Anti-sticking cycle disabled
VA-7452-1001	• Proportional control • Self-calibrating • 0 to 10 VDC input signal • Direct Acting
VA-7452-9001	• Proportional control • Self-calibrating • Selectable input signals for range splitting (0 to 10, 0 to 5, 5 to 10 VDC). • Reversible Action • Selectable combined flow characteristic in combination with VG5000 series terminal unit valves • Selectable Anti-sticking cycle







See "VA-7450" Product Bulletin for more information.

Operation

These valves are used for hot or cold water and for water glycol mixtures up to 30%.

Note: These valves are intended to control equipment under normal operating conditions. Where failure or malfunction of the valves could lead to an abnormal operating condition that could cause personal injury or damage to the equipment or other property, other devices (limit or safety controls) or systems (alarm or supervisory systems) intended to warn of or protect against failure or malfunction of the valves must be incorporated into and maintained as part of the control system.

When the stem of the valve is moved down by the actuator against the return spring, it opens the N.C. port or closes the N.O. port of a valve.

Valve Type	Stem movement / flow	
 2-way NO, PDTC *)	 Actuator stem down	 Actuator stem up
		
 2-way NC, PDTO *)	 Actuator stem down	 Actuator stem up
		
 3-way + NO ByPass	 Actuator stem down	 Actuator stem up
		
 3-way, mixing	 Actuator stem down	 Actuator stem up
		

*) PDTC = Push down to close
 PDTO = Push down to open

Mounting Instructions


General Guidelines

In addition to general installation instructions, please observe the following points:

- Ensure that valve body and piping are free of impurities.
- Pay attention to position of the valve relative to the flow direction.
- Note arrows on valve body.
- Ensure that threaded connections of valve and piping are tighten.
- Ensure installation without tension and torque.
- Do not use the valve as a step or fixation point. Only piping supports it.
- Protect valve from dust or dirt on construction sites.
- Provide strainer or filter upstream of valve.
- Use compensators to balance thermal expansion of piping.
- Ensure that stem thread and shaft are kept free of paint.

Installation Site Information

The valve installation site should be easily accessible and provide sufficient room for service and removal of actuators. Manual shut-off valves should be located up and downstream of the control valve, to facilitate service and repairs without drainage of the piping system. The control valve should preferably be installed in vertical or horizontal position.

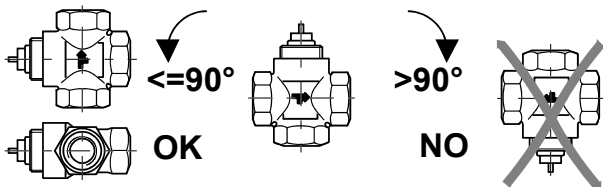

Piping should be insulated to protect actuators against high temperatures. Insulation should leave sufficient room for service of stem packing. To ensure trouble free function of the control valves the pipe immediately upstream of the valve should be straight for the length of at least 2x DN and the pipe immediately downstream straight for the length at least 6x DN.

Valve Removal

In addition to general guidelines the following points should be observed:

- Pressure free piping system
- Cooled fluid
- Drained piping system
- With corrosive or aggressive fluids, the piping system should be vented.
- Work to be performed by qualified personnel only.


Commissioning

Prior to commissioning check information on material, pressure, temperature and flow direction in conjunction with the installation piping system plan. Impurities in the piping system and valves, such as dirt, welding beads etc. will cause the system to leak. Prior to commissioning a new installation or re-commissioning after repairs or service, ensure that:

- Correct installation- and assembly work has been completed.
- Only qualified personnel carry out commissioning.
- Correct functional position of the valve is ascertained.
- Maintenance of existing protective facilities is carried out.

Adjustments

The Kv_s value can be adjusted on some models (see "Ordering Code" on page 2) by setting the screw on top of the valve in any of five selection marks.

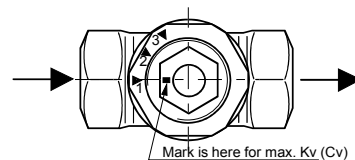

The Kv_s values of the three positions for the different valve sizes are stated in the "Ordering Data" (see page 2).

Technical Specifications

Product	VG5000			
Models	VG52xx	VG54xx	VG55xx	VG58xx
Body Type	2-way PDTC (NO)	2-way PDTO (NC)	3-way with built-in NO by-pass	3-way mixing
Body Rating	PN 16 Nominal, 20 bar (300 psi) maximum rated pressure			
Flow Characteristic	Inherent: Quick Opening with VA-7452-9001 actuator: improved combined flow characteristic for modulating control			
Service	Water, glycol solutions (max 30%) for HVAC applications. Fluid Group 1 according 67/548/EEC. (proper water treatment is recommended, refer to VDI 2035)			
Body Size	DN15	DN20	DN25	
Max. Pressure drop Δp	200 kPa	100 kPa	62 kPa	
Kv _s and max. close-off pressure	See “Ordering Code” on page 2			
Body Connections	Gas BSP Parallel (ISO 228/1, BS 2779, DIN 259) Gas BSP Taper (ISO R7/1, BS 21, DIN 2999) Compression fittings (EN 1254-2) NPT American Standard Pipe Thread (ANSI B1.20.1) Sweat Female (ANSI B16.18)			
Nominal Stroke	3 mm			
Connection to Actuator	M28 x 1.5			
Materials	Body: EN12165 CW617 CuZn40Pb2 Trim: Centrepiece: EN12164 CW614 CuZn39Pb3 Locknut: EN12164 CW614 CuZn39Pb3 Packing nut: EN12164 CW614 CuZn39Pb3 Packing: (2) EPT 851 O-ring (Ethylene Propylene Terpolymer) Stem: AISI 303 stainless steel (X10CrNiS1809) Spring: AISI 302 stainless steel (X10CrNi1809) Plug: EPT 7010 Rubber (Ethylene Propylene Terpolymer)			
Leakage	Max 0,01% of K _{VS} , Class IV for ANSI FCI 70-2 and EN60534-4 modif. 1			
Fluid Temperature Limits	2...95 °C			
Ambient Temperature Limits	2...50 °C			
Max. weight packaging excluded	DN15	DN20	DN25	
2-way NO	280 g	390 g	690 g	
2-way NC	330 g	420 g	670 g	
3-way mixing	370 g	480 g	790 g	
3-way + built-in bypass	500 g	550 g	-	
Compliance	PED (Pressure Equipment Directive) 23/97/CE (Paragraph 3, comma 3) CE marking is not applicable.			

The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls, Inc. shall not be liable for damages resulting from misapplication or misuse of its products.



Johnson Controls International, Inc.

Headquarters: Milwaukee, Wisconsin, USA
European Customer Service Center: Westendhof 3, D-45143 Essen, Germany
European Factories: Essen (Germany), Leeuwarden (The Netherlands) and Lomagna (Italy)
Branch Offices: Principal European Cities.