


CAST IRON Y-TYPE STRAINERS FLANGED ENDS

PN 16, CLASS 150

CAST IRON 'Y' TYPE STRAINERS FLANGED ENDS

TEST PRESSURE:- TESTED TO:-26 BAR (HYD.)

WORKING PRESSURE:- MAX.BOP 188.6 Psig AT 428°F

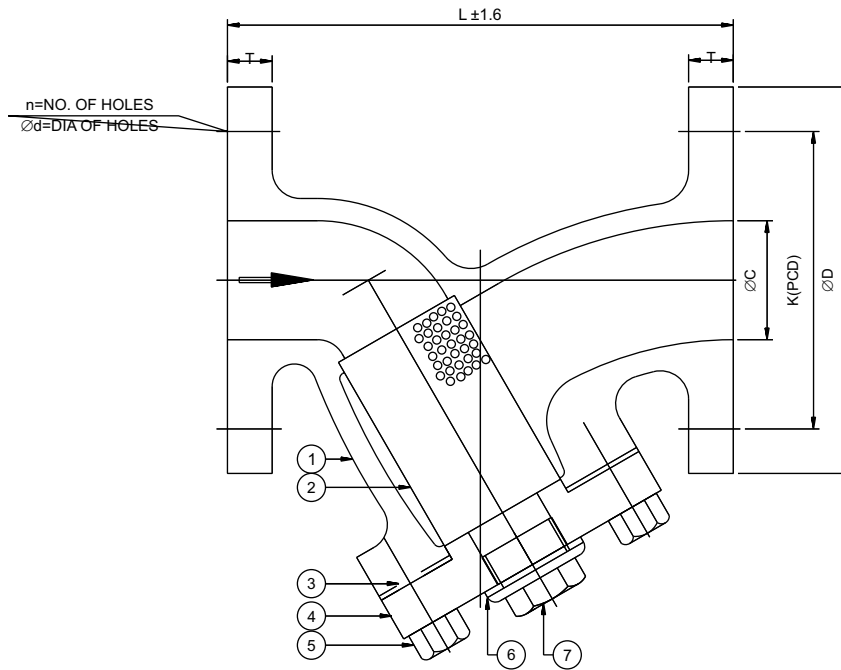

STANDARD MATERIAL COMBINATION

P.NO.	NO.OFF	NAME OF PART	MATERIALS	SPECIFATIONS
1	1	BODY	C.I	BSEN 1561 Gr.GJL 200
2	1	STRAINER	S.S	TYPE 304
3	1	GASKET	C.A.F	IS 2712 Gr.C
4	1	COVER	C.I	BSEN 1561 Gr.GJL 200
5	4	STUDS & NUTS	CARBON STEEL	BS 916
6	1	GASKET	C.A.F	IS 2712 Gr.C
7	1	DARIN PLUG	C.I	BSEN 1516 Gr. GJL 200

DIMENSIONAL DATA

VALVE SIZE	L	T	øC	øD	K	n	ød	Aprox. Wt. ^
15 mm	134	12.7	12.7	95.5	66.7	4	14.3	
20 mm	142	12.7	19	102	73	4	14.3	
25 mm	168	12.7	25	120.7	87.3	4	17.5	
40mm	190	16	38	140	104.8	4	17.5	
50mm	196	19.1	51	165	127	4	17.5	
65mm	204	19.1	63.5	184.5	146	8	17.5	
80mm	261	19.1	76	203	165.1	8	17.5	
100mm	296	22.2	101.6	228.6	190.5	8	17.5	
125mm	357	25.4	127	279.4	235	12	22.3	
150mm	385	25.4	152.5	305	260.5	12	22.3	
200mm	441	28.6	203	368.5	324	12	22.3	

NOTE: The above data is subject to change without notice due to our continuing product improvement program. (^WEIGHT GIVEN IN KGS)